

# **ROUSSEAU CO.**

Quality Power Tool Accessories

## **OWNER'S MANUAL**



MADE IN THE  
**USA**

## **Quick Fold Miter Saw Stand**

Model 2910

### **IMPORTANT**

Read and understand all safety guidelines and instructions carefully before operating.

## GENERAL INFORMATION

You have purchased a Rousseau Company **QUICK FOLD MITER SAW STAND 2910**. Designed for home or job site use, it excels at handling long heavy material. This unit sets up and folds quickly.

## WARRANTY

This product has a lifetime warranty to the original purchaser. The warranty applies to defects in materials and workmanship only. We will repair or replace the product or part(s) at our discretion. This warranty does not apply to product failure or defects due to direct or indirect misuse, abuse, negligence, accidents, alterations, repairs or lack of maintenance. The item must be shipped prepaid to our Clarkston, WA location. If items must be returned for warranty service, call to receive a Return Goods Authorization (RGA) number and further instruction.

## SAFETY GUIDELINES

**THIS SECTION CONTAINS IMPORTANT SAFETY INFORMATION CONCERNING A HAZARD THAT MAY CAUSE SERIOUS INJURY OR DEATH**, and/or damage to stand or equipment if used improperly. Please read the following instructions very carefully.

### **⚠️ WARNING**

Always follow the safety recommendations and guidelines provided by the manufacturer of your tools. When in doubt refer to your owner's manual.

### **⚠️ WARNING**

Always set stand on level ground or floor surface, making sure all legs are in contact with the ground or floor. Extend legs until locked. Failure to do so could result in saw movement or the collapse of the table causing injury to the operator or to the equipment.

### **⚠️ WARNING**

Always keep hands clear of hinge and pivot points. Failure to do so could result in serious injury or loss of fingers.

### **⚠️ WARNING**

Be sure saw is bolted down securely. Failure to do so could result in serious injury to self, saw and/or stand.

### **⚠️ WARNING**

Adjust rollers or other material support surface to level with bed of miter saw. Failure to do so could result in kickbacks, causing serious injury to self, saw and/or stand.

### **⚠️ WARNING**

When cutting small pieces use a hold down stick or clamp work piece securely. Failure to do so could result in kickbacks, serious injury to self, saw and/or stand.

### **⚠️ WARNING**

**The saw and stand together are very heavy. Two people are needed to move stand and saw. Saw should be removed from stand before moving with one person.**

## INITIAL SET UP OF STAND

We suggest setting the stand up and folding it down before mounting the saw to understand the catch and release action of this unit. The legs swing toward the front of the stand.

1. **MOUNTING SAW:** With the stand set up, place the saw on top. Locate the saw toward the rear of the stand to allow as much room as possible for the material being cut. Align fence of saw perpendicular to the sides of the stand. Left and right location of saw will depend on stock support and stop system being used.

2. Mark mounting holes with a pencil. Make sure holes will clear stock support tubes under stand top. Remove the saw.

3. Center punch in the middle of the marks and drill holes slightly larger than bolts being used.

4. Set saw back on stand. Bolts may be inserted with threads either up or down depending on the most convenient place for knobs. If bolts are placed with threads down, they should protrude between 1/2" to 3/4" to clear folding legs. Hand-tighten a knob onto each bolt. Check alignment of saw.

## PREPARING TO FOLD STAND WITH SAW MOUNTED

Set the saw at the maximum angle to the right hand side and lock in place. Lock the head of the saw in the down position. For sliding compound saws, pull the saw completely forward and lock it in place. After folding two people are required to move stand with saw attached.

## FOLDING STEPS WITH SAW ON STAND

**NOTE:** Before folding the stand, secure all locks to eliminate any saw movement.



**STEP 1:** Place foot against the front leg and lift the top of the stand by the handle just enough to release the rear leg.

**STEP 2:** Pull stand toward you and slide top of rear leg back until rear leg is parallel with front leg.

**STEP 3:** Slowly lower saw.

**STEP 4:** Walk around saw and have another person pick up legs.

**STEP 5:** Now you are ready for transporting!

## OPTIONAL ACCESSORIES AVAILABLE

### STOP SYSTEM


#### **Model 6000L**

For Left Side  
With Heavy  
Duty Steel  
Flip Stops

### ROLLER STOCK SUPPORT

#### **Model 2911**

For Right Or Left  
Total Of 140"  
Stock Support

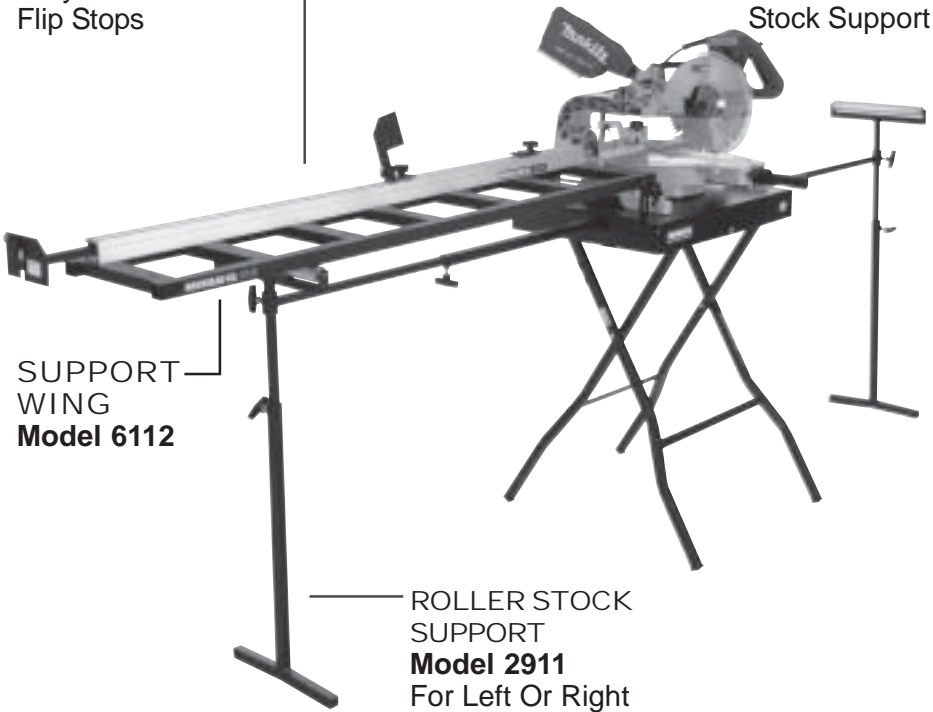

### SUPPORT WING

#### **Model 6112**

### ROLLER STOCK SUPPORT

#### **Model 2911**

For Left Or Right  
Total Of 140"  
Stock Support

## **ROUSSEAU CO.**

1718 13th Street Clarkston, WA 99403

800-635-3416 • 509-758-3954 • Fax 509-758-4991

email:salesinfo@rousseauco.com • www.rousseauco.com